



**ARTEL**

[www.rrpelletkachel.nl](http://www.rrpelletkachel.nl)




**Nu Continu  
Pellet aanvoer**



**Pelletkachel**

**CurveNext**

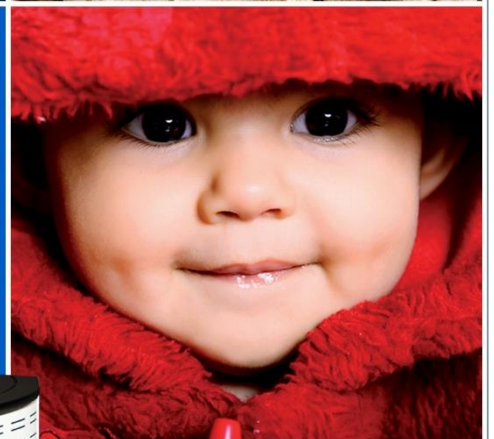

<b>CURVENEXT</b>		<b>8</b>		<b>10</b>	
	<b>Eenheid</b>	<b>Max.</b>	<b>Min.</b>	<b>Max.</b>	<b>Min.</b>
 <b>Continu</b>	<b>Omw./min.</b>	2700	630	2700	630
 <b>POWER</b> Vermogen	<b>kW</b>	7,48	2,84	10,10	2.5
 <b>Rendement</b>	<b>%</b>	92,6	91	92,7	89,53
 <b>Afvoer Diam.</b>	<b>mm</b>	Ø 80		Ø 80	
 <b>Inlaat Diam.</b>	<b>mm</b>	Ø 50		Ø 50	
 <b>Pellettank Inh.</b>	<b>kg</b>	13		13	
 <b>Pellet diameter</b>	<b>mm</b>	Ø 6		Ø 6	
 <b>Verbruik / uur</b>	<b>kg/h</b>	1,68	0,5	2,6	0,6
 <b>Oppervlakte</b>	<b>m<sup>2</sup></b>	* 50		* 60	
 <b>Gewicht</b>	<b>kg</b>	80		90	
 <b>WiFi</b> READY	<b>Optie</b>	Ja		Ja	
 <b>DUCTED</b>	<b>Optie</b>	Nee		Ja	
<b>Afmeting</b>	<b>HxBxD</b>	865x520x475		996x520x475	
<b>Gloei bougie.</b>		Keramisch		Keramisch	
<b>Uitvoering</b>		Open toestel		Open toestel	
<b>Afvoer positie</b>		Achter		Achter	

- Verwarmbaar volume is gebaseerd op een redelijk tot goed geïsoleerde woning met standaard kamerhoogte van ± 260 cm.